

■DESCRIPTION

Installed in the SX-2100AI Audio input unit of the SX-2000 series and connected to a network (LAN or WAN), the SX-200IP allows paging announcements to be made to the SX-2000 system from the N-8000 series' station(s) (N-8600MS and N-8610RM) employing the packet audio technology.


■SPECIFICATIONS

Network Section	Network I/F: 10BASE-T/100BASE-TX (Automatic-Negotiation) Network protocol: TCP/IP, UDP, HTTP, RTP, ARP, ICMP, IGMP Connector: LAN: RJ45 connector Voice sampling frequency: 16 kHz, 8 kHz (controllable on the software) 48 kHz sample rate is used for SX-2000 system only. Quantifying bit number: 16 bits Voice encoding method: Sub-band ADPCM, Cryptosystem Voice packet loss recovery: Silence insertion Audio delay time: 80 ms, 320 ms (controllable on the software)
Indicator	Operation indicator (RUN)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Panel: Pre-coated steel plate, black, 30 % gloss
Dimensions	35 (W) × 119.5 (H) × 178.4 (D) mm (1.38" × 4.7" × 7.02")
Weight	150 g (0.33 lb)

Operating Requirements

	SX-2000SM	SX-2100AI SX-2000AO/2100AO	SX-2000CI SX-2000CO
firmware Version	3.10 or later	3.10 or later	2.01 or later
PC setting software Version	3.10 or later	—	—

■APPEARANCE

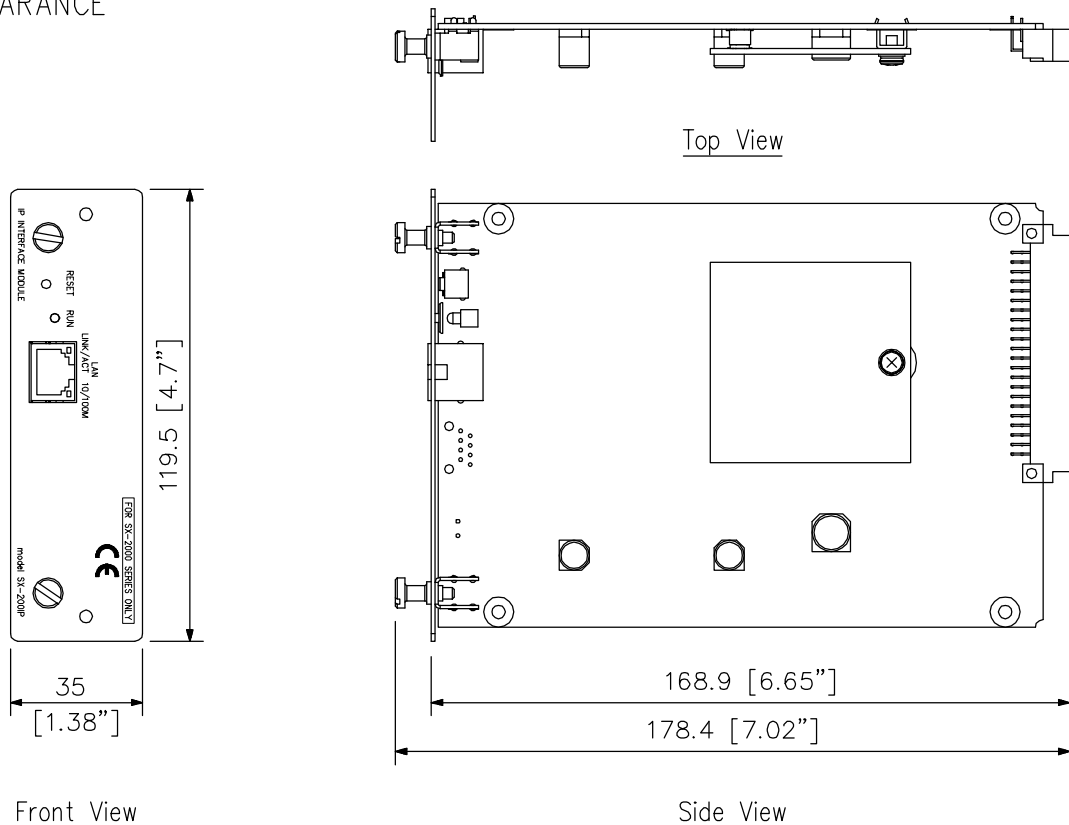

UNIT:mm SCALE:1/2